



1/20/2012

CONDENSED INSTALLATION SPECIFICATIONS
 SEWER SERVICE LINE AND SEWER SERVICE CONNECTIONS SHALL BE INSTALLED BY SKILLED WORKMEN AT THE COST OF THE CUSTOMER IN ACCORDANCE WITH RULES AND REGULATIONS AND DETAILED SPECIFICATIONS OF THE AUTHORITY WHICH ARE CONDENSED ON THE FOLLOWING PAGE.
 A FITTING MAY BE UTILIZED AT THE POINT OF PROPERTY OWNER CONNECTION TO SERVICE LATERAL TO ALLOW FOR VERTICAL INSTALLATION OF INSPECTION PORT WHILE MAINTAINING REQUIRED MINIMUM GRADE.

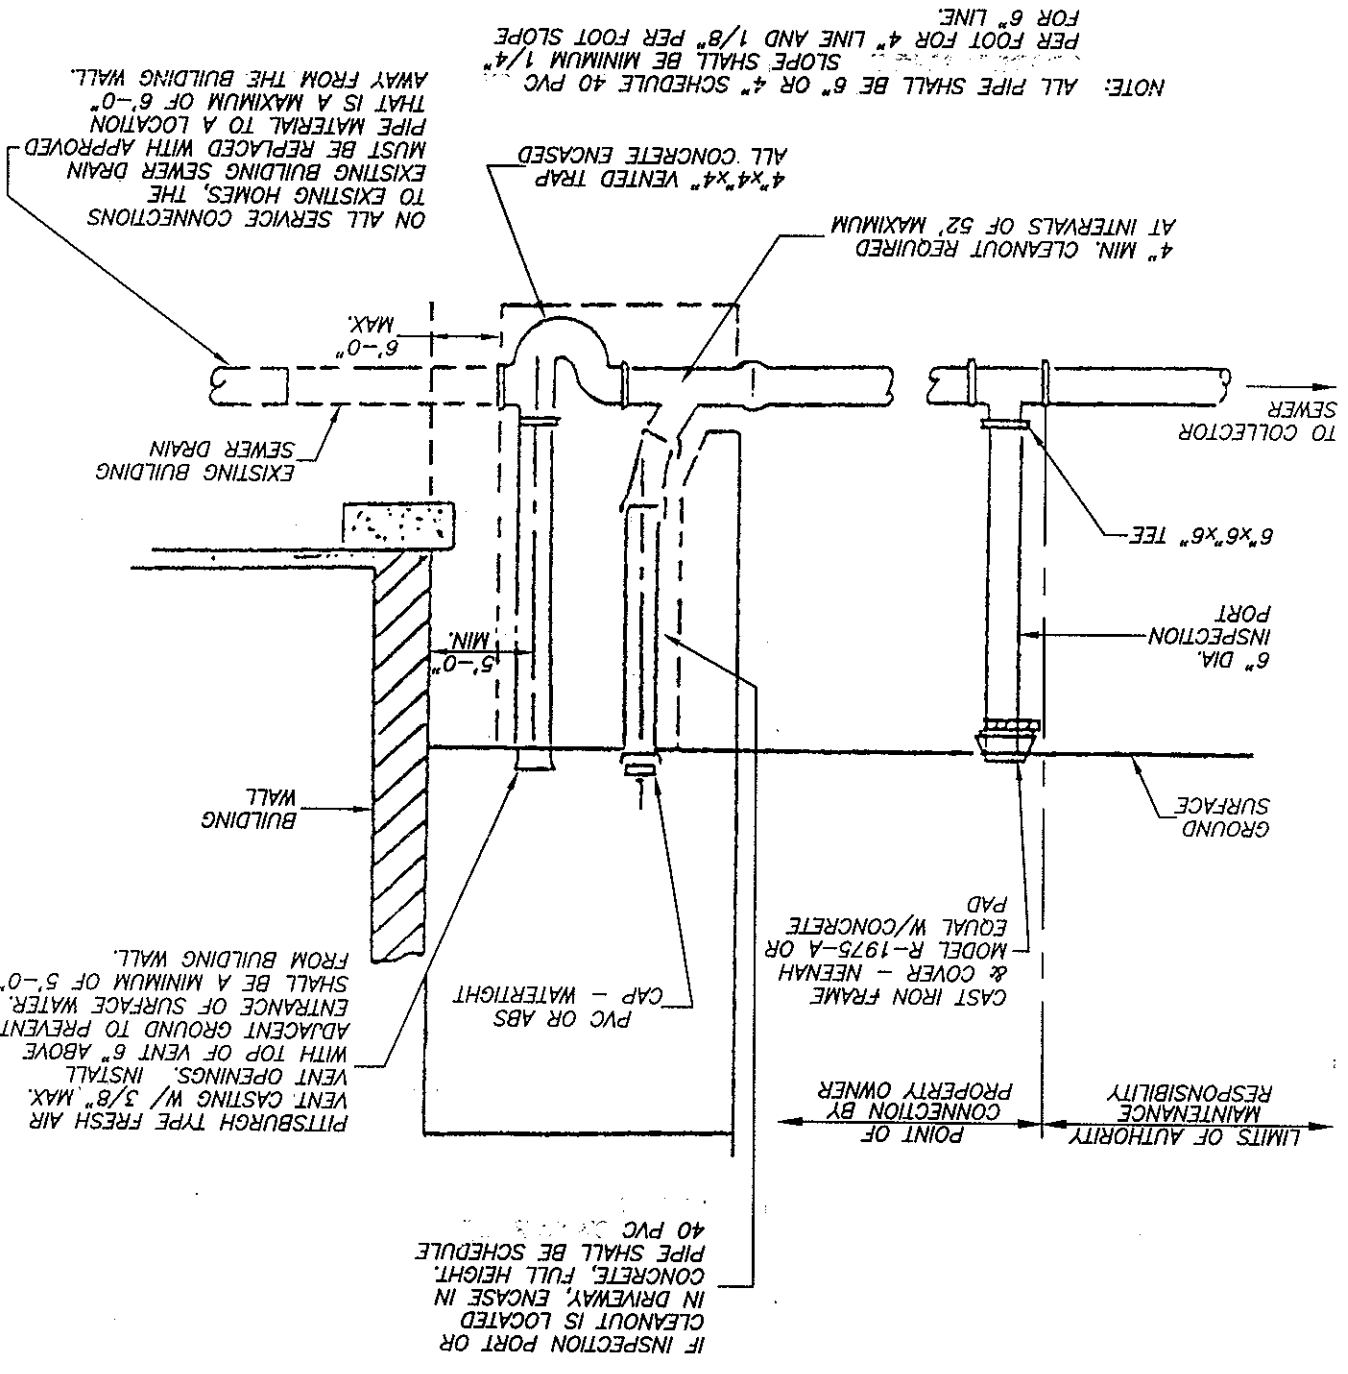

1/20/01
6010

SEWER SERVICE LINE TRENCH CROSS SECTION

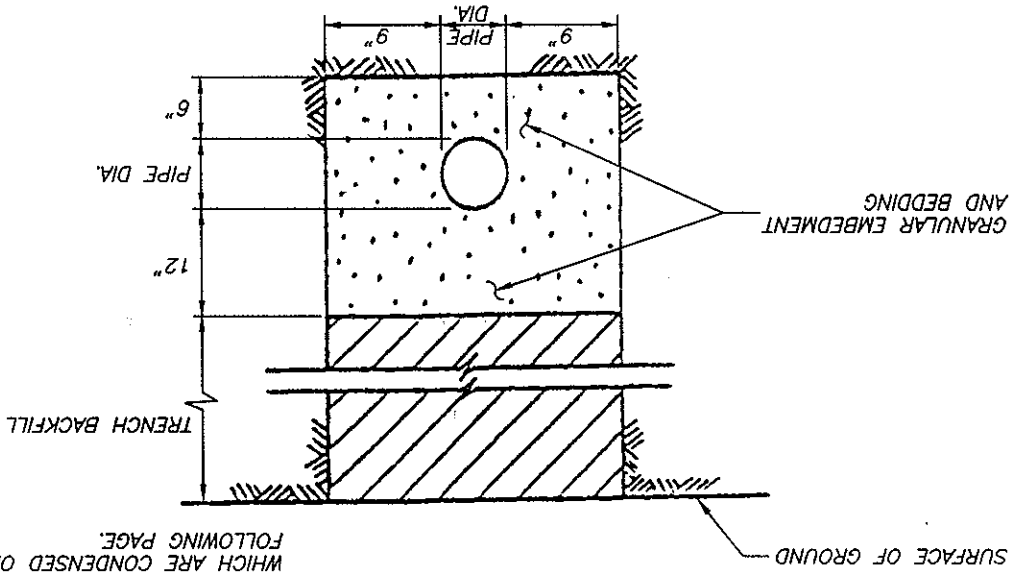


SEWER SERVICE LINE AND SEWER SERVICE CONNECTIONS SHALL BE INSTALLED BY SKILLED WORKMEN AT THE COST OF THE CUSTOMER IN ACCORDANCE WITH RULES AND REGULATIONS AND DETAILED SPECIFICATIONS OF THE AUTHORITY WHICH ARE CONDENSED ON THE FOLLOWING PAGE.

- ALL PIPE SHALL BE 6" OR 4" SCHEDULE 40 PVC WITH A MINIMUM 1/4" PER FOOT FOR 4" LINE AND 1/8" PER FOOT FOR 6" LINE.
- EACH AND EVERY SEWER EXITING A BUILDING (GREY AND BLACK WATER) SHALL BE PROVIDED WITH A SEPARATE VENT AND TRAP ASSEMBLY.

CONDENSED INSTALLATION SPECIFICATIONS:
NEW INSTALLATION PLAN


NOTE:

SEPTIC TANK BYPASS PLAN

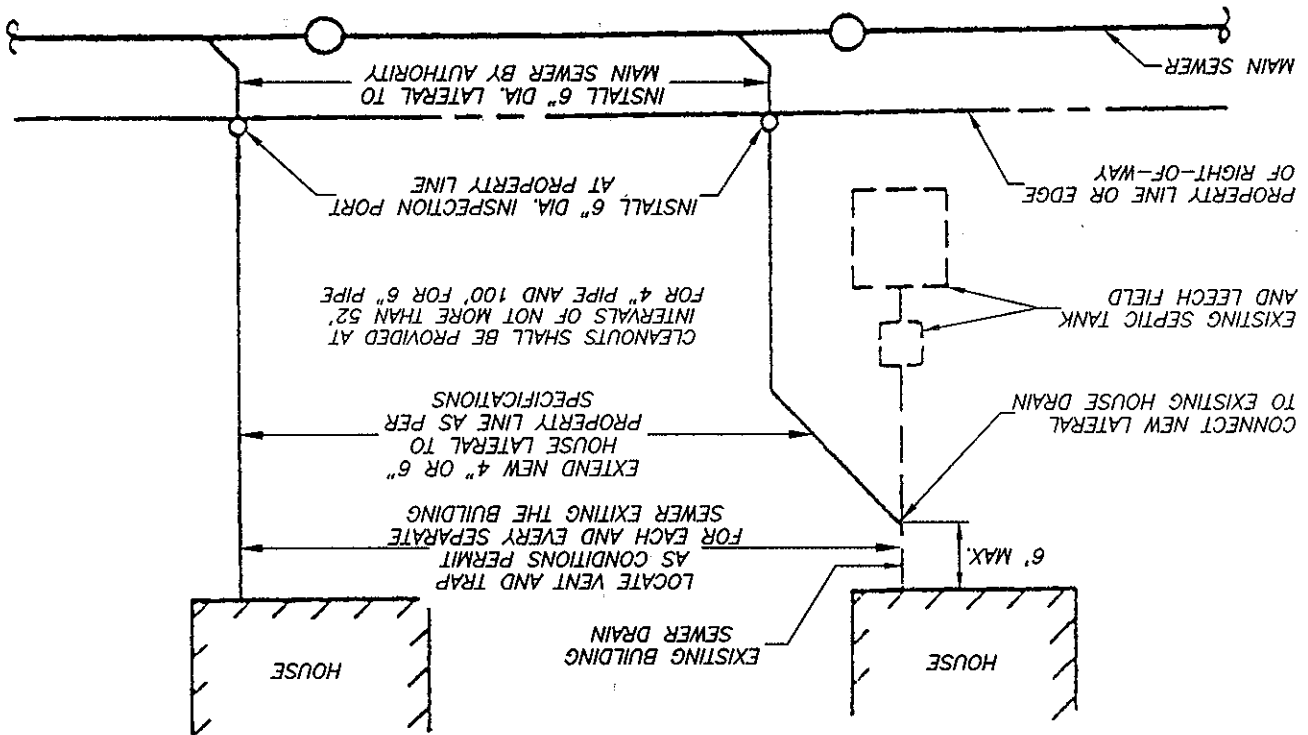

Chairman

Robert Polczynski

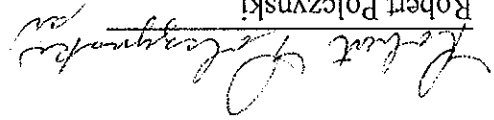

Upon receipt of a delinquent notice, an additional \$50.00 minimum inspection charge will apply.

If you fail to comply within sixty days, you will be charged an additional inspection fee.

Within sixty days of tapping into the sewer system, you must have the viewport installed and inspected.

March, 2009

WESTMORELAND COUNTY PENNSYLVANIA

Municipal Authority of Allegheny Township

